

ERSATZTEILE | STROMLAUFPLÄNE GP 250/500

Spare parts | Pièces de rechange | Onderdelen | Reservedele | Varaosat |
Pezzi di ricambio | Reservedelen | Peças | Reservdelar | Piezas de recambio

Circuit diagrams | Schéma de connexions | Stroomschema | Kredslobsdiagrammer |
KytKentäkaavio | Aansluitschema | Schema elettrico | Koplingskjema |
Esquema electrico | Elschema | Esquema eléctrico




since
1957


www.gis-ag.ch



12.17 Originaldokument 9500.9012.7

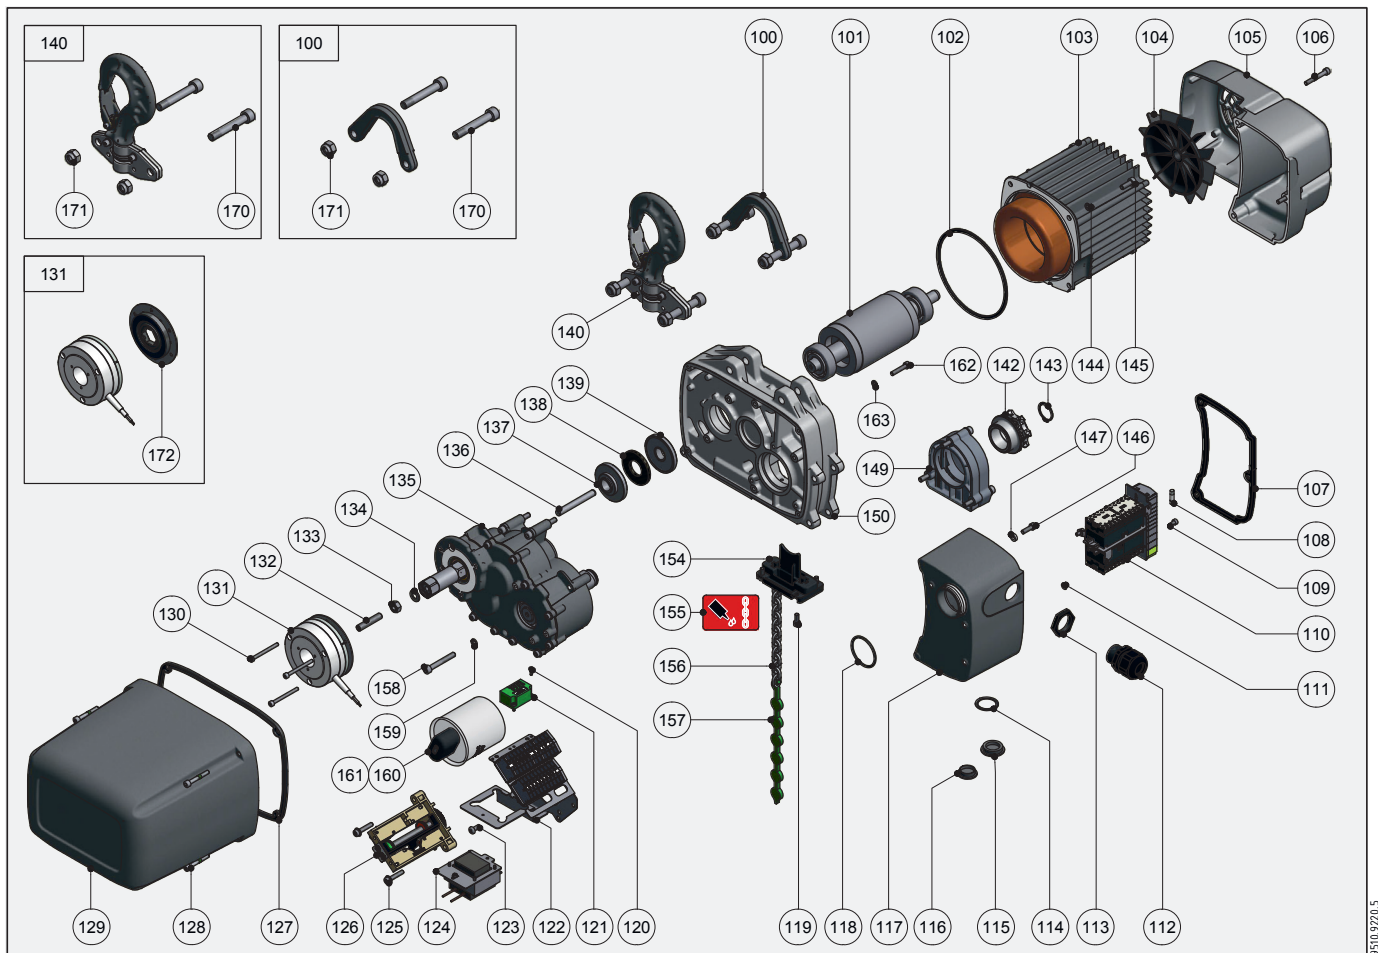

9510.9220.5

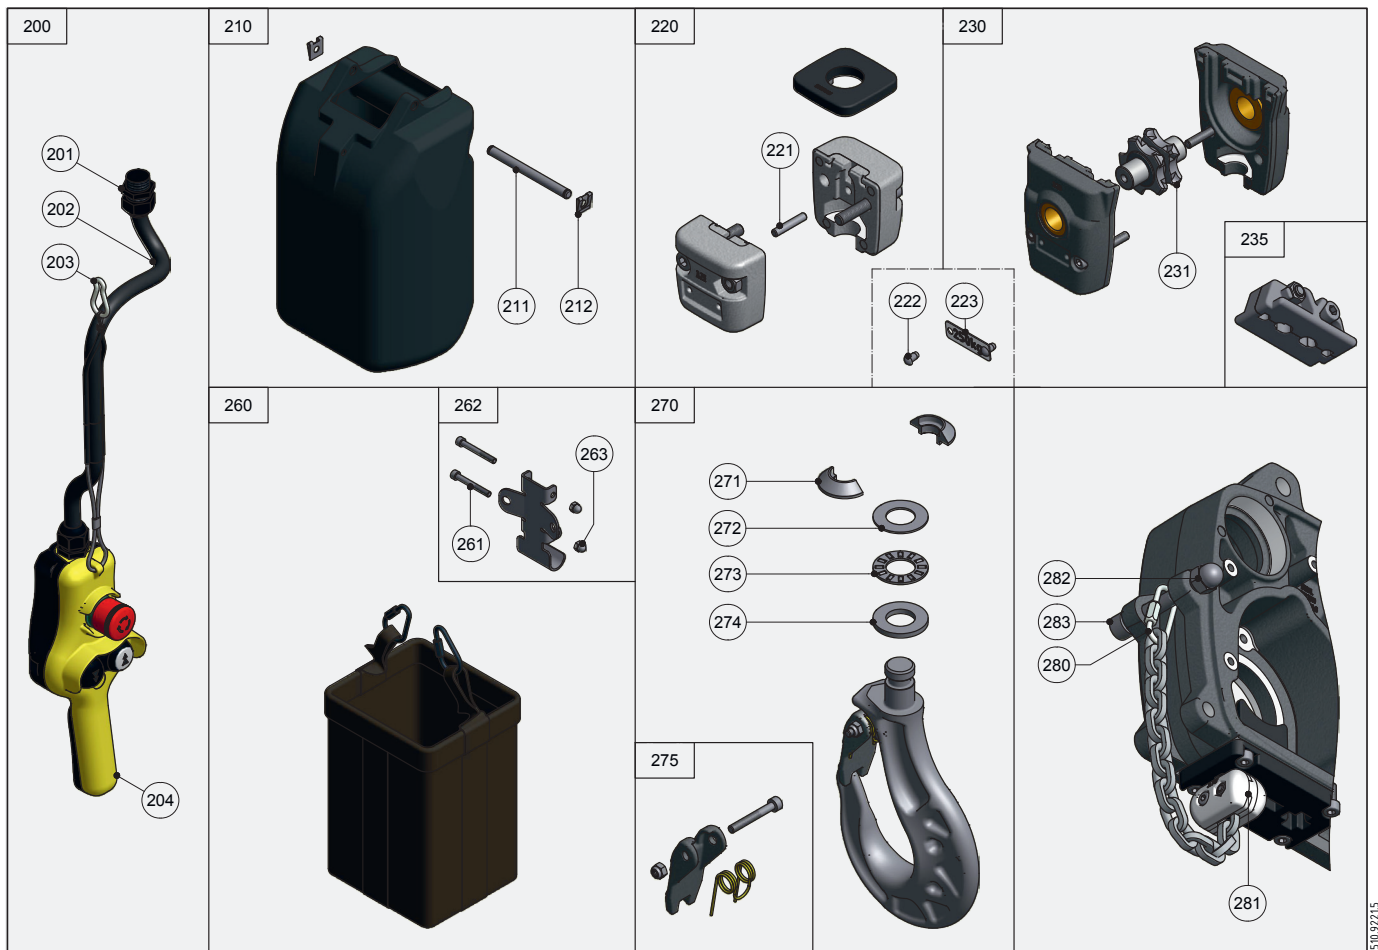

9510.9221.5

		GP 250	GP 500
100*	84 x 59	9510.3077.3	9510.3077.3
101	1t / 2t, L=90, -N/-NF	9510.3027.3	9510.3027.3
102	ø125 / ø117 x 2.5	9510.3054.4	9510.3054.4
103	2/8p, 3 x 400V 50Hz	9512.0350.3	9512.0350.3
	2/8p, 3 x 230V 50Hz	9512.0351.3	9512.0351.3
	2/8p, 3 x 460V 60Hz	9512.0350.3	9512.0350.3
	2p, 3 x 230/400V 50Hz, 3 x 460V 60Hz	9512.0250.3	9512.0250.3
	4p, 1 x 115/230V 50Hz	9512.0158.3	9512.0158.3
104	ø134 / ø13.5 x 35	9510.3062.3	9510.3062.3
105	165 x 88 x 232	9510.3011.1	9510.3011.1
106	M5 x 35/22 N	9030.0331	9030.0331
107*	110 x 166 x 5	9510.3033.3	9510.3033.3
108	0.4A UL	9052.0013	9052.0013
109	M4 x 8	9030.0325	9030.0325
110	2t+NA, 42V	9512.1100.2	9512.1100.2
	1t+NA, 42V	9512.1000.2	9512.1000.2
	1t+NA, 115/42V 1Ph	9512.1053.2	9512.1053.2
	1t+NA, 230/42V 1Ph	9512.1052.2	9512.1052.2
111	ø4.3 / ø8 x 0.8	9031.3706	9031.3706
112	M25 x 1.5	9055.3103	9055.3103
113	M25	9055.4013	9055.4013
114	ø29.5 / ø23.2 x 1	9040.2511	9040.2511
115	M25 x 1.5	9055.3513	9055.3513
116	M20 x 1.5	9055.3512	9055.3512
117	102 x 165 x 102	9510.3006.2	9510.3006.2
118	ø38.7 x 2.65 NBR 70	9035.0033	9035.0033
119	M5 x 12 T	9030.0003	9030.0003
120	M3 x 8	9030.8030	9030.8030
121	PMEA 500	9050.4023	9050.4023
122	1t, 2t, max. 480V	9512.1200.3	9512.1200.3
	DC	9512.1201.3	9512.1201.3
	1Ph	9512.1203.3	9512.1203.3
123	M5 x 10	9030.0027	9030.0027
124	400/42V 50/60Hz	9056.4601.4	9056.4601.4
	115/230//42V 50/60Hz	9056.4644.4	9056.4644.4
	230/460//42V 50/60Hz	9056.4641.4	9056.4641.4
125	M5 x 25	9030.0022	9030.0022
126	103 x 84 x 41	9500.3069.3	9500.3069.3
127*	230 x 162 x 5	9510.3034.3	9510.3034.3
128	M5 x 35/22 N	9030.0331	9030.0331
129	228 x 160 x 208	9510.3005.3	9510.3005.3
130	M4 x 45	0030.9287	0030.9287
131	3Nm, 100-125VAC 50/60Hz	9050.4082	
	6Nm, 100-125VAC 50/60Hz		9050.4055
	3Nm, 200-240VAC 50/60Hz	9050.4083	
	6Nm, 200-240VAC 50/60Hz		9050.4056
	3Nm, 360-420VAC 50/60Hz	9050.4084	
	6Nm, 360-420VAC 50/60Hz		9050.4057
	3Nm, 440-480VAC 50/60Hz	9050.4085	
	6Nm, 440-480VAC 50/60Hz		9050.4058
132	M8 x 40	9030.2018	9030.2018
133	M8	0031.0008	0031.0008
134	ø8.4 / ø16 x 1.6	0031.0578	0031.0578
135	195 x 148 x 201 N	9510.3020.2	9510.3020.2
	195 x 148 x 201 S	9510.3022.2	9510.3022.2
136	ø8 x 65	9031.5862	9031.5862
137*	ø45 x 13.2	9510.3059.4	9510.3059.4
138*	ø40 / ø26.5 x 4	9510.3057.4	9510.3057.4
139*	ø45 x 10.5	9510.3058.4	9510.3058.4
140*	171 x 115 x 34.6	9510.3078.3	9510.3078.3
142*	ø52.2 x 35.5	9510.3030.2	
	ø54 x 35.5		9511.3030.2
143	DIN 471, 22 x 1.2	9031.2013	9031.2013
144	M6	9031.3903	9031.3903
145	M6 x 16	9030.0275	9030.0275
146	M5 x 16	9030.0262	9030.0262
147	ø9.8 / ø5.1 x 3	9031.3705	9031.3705
149*	66 x 31 x 88	9510.3061.4	9511.3061.4
150	187 x 55 x 250	9511.3000.1	9511.3000.1
154*	80 x 55 x 45	9510.3008.3	
	80 x 53 x 45		9511.3008.3
155	0.25 l	9041.0007	9041.0007
156*	3.75 x 10.75	9039.0028	
	5.25 x 15		9039.0029
157	140 x 12 x 3 (3.75)	9041.6034	
	193 x 17 x 5 (5.25)		9041.6035
158	M6 x 45/24	9030.0280	9030.0280
159	M6	9031.3903	9031.3903
160	110µF, 1Ph 230V 50Hz	9059.0024	9059.0024
	200µF, 1Ph 115V 50Hz	9059.0025	9059.0025
	275µF, 1Ph 115V 50Hz	9059.0020	9059.0020
161	4.5 x 360	0055.0818	0055.0818
162	M5 x 25	9030.0265	9030.0265
163	M5	9031.3902	9031.3902
170	M10 spez.	9400.3049.4	9400.3049.4
171	M10	9031.1278	9031.1278
172*	ø84 x 9	9400.3156.4	9400.3156.4

[illegible]

