



Single Flange Wheels



Plain or tapered tread available

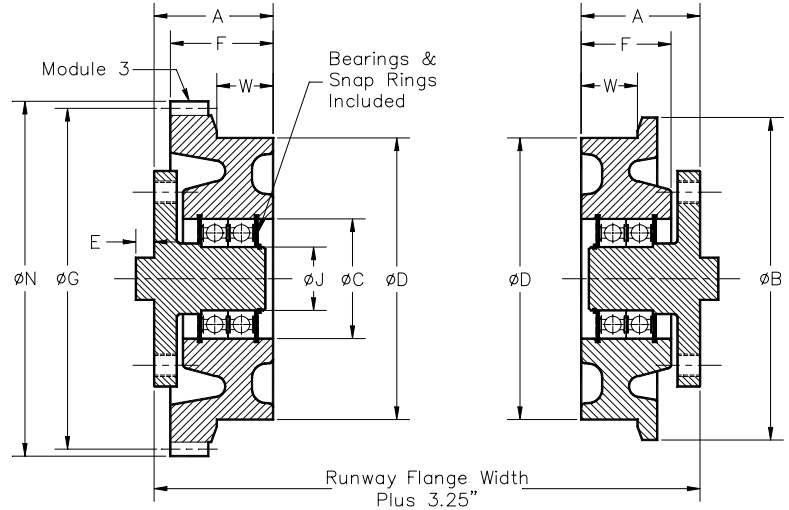

| Model | | A | B | C | D (Tread Dia.) | E | F | G (Pitch Dia.) | H | J (Axle Dia.) | K | L | M | N | W | No of Teeth | Gear Module | Max Wheel Load |
|-------|----|------|-------|------|----------------------|------|------|----------------------|----------|---------------------|------|------|------|-------|------|----------------|----------------|-------------------|
| SF130 | mm | 64 | 160 | 62 | 130 | 6 | 58 | 156 | 1/2-13NC | 30 | 102 | 82 | 30 | 162 | 26 | 52 | 3 | 1497 kg |
| | in | 2.52 | 6.30 | 2.44 | 5.12 | 0.24 | 2.28 | 6.14 | 1/2-13NC | 1.18 | 4.02 | 3.23 | 1.18 | 6.38 | 1.02 | 52 | 3 | 3300 lbs |
| SF200 | mm | 76 | 229 | 85 | 200 | 13 | 73 | 247 | 5/8-11NC | 45 | 153 | 121 | 30 | 252 | 40 | 82 | 3 | 2983 kg |
| | in | 2.99 | 9.02 | 3.35 | 7.87 | 0.51 | 2.87 | 9.72 | 5/8-11NC | 1.77 | 6.02 | 4.76 | 1.18 | 9.92 | 1.57 | 82 | 3 | 6578 lbs |
| SF315 | mm | - | 346 | 120 | 315 | - | 110 | 387 | - | 55 | - | - | - | 393 | 55 | 129 | 3 | 6338 kg |
| | in | - | 13.62 | 4.72 | 12.40 | - | 4.33 | 15.24 | - | 2.17 | - | - | - | 15.47 | 2.17 | 129 | 3 | 13975 lbs |

Axle Modules for Single Flange Wheels

| Model | | A | B (Axle Dia.) | C | D | E | F | G | |
|-------|----|------|------------------|------|------|------|------|------|----------|
| SFA30 | mm | 67 | 30 | 6 | 30 | 82 | 102 | 14 | 1/2-13NC |
| | in | 2.64 | 1.18 | 0.24 | 1.18 | 3.23 | 4.02 | 0.55 | 1/2-13NC |
| SFA45 | mm | 90 | 45 | 13 | 30 | 121 | 153 | 16 | 5/8-11NC |
| | in | 3.54 | 1.77 | 0.51 | 1.18 | 4.76 | 6.02 | 0.63 | 5/8-11NC |

