

## Low Headroom Electric Wire Rope Hoist

### Hoist model CVAT5522TpE315N

Capacity - 20 ton in FEM9.511 - 1Am

Lifting Height - 9m

Lifting Speed - 4.8/1.2 m/min

Voltage Supplies - 230, 460, 575V-3ph-60Hz

Trolley Speed - 14.4/4.8 m/min

Rope Reeving - 4/1

Net Weight (without counter weight) - 1,535kg


Electric panel mounted to counter weight

Mechanical overload protection (OL)

Optional thermal overload protection (Tp)

\*Standard flange width up to 300mm

300~508mm optional

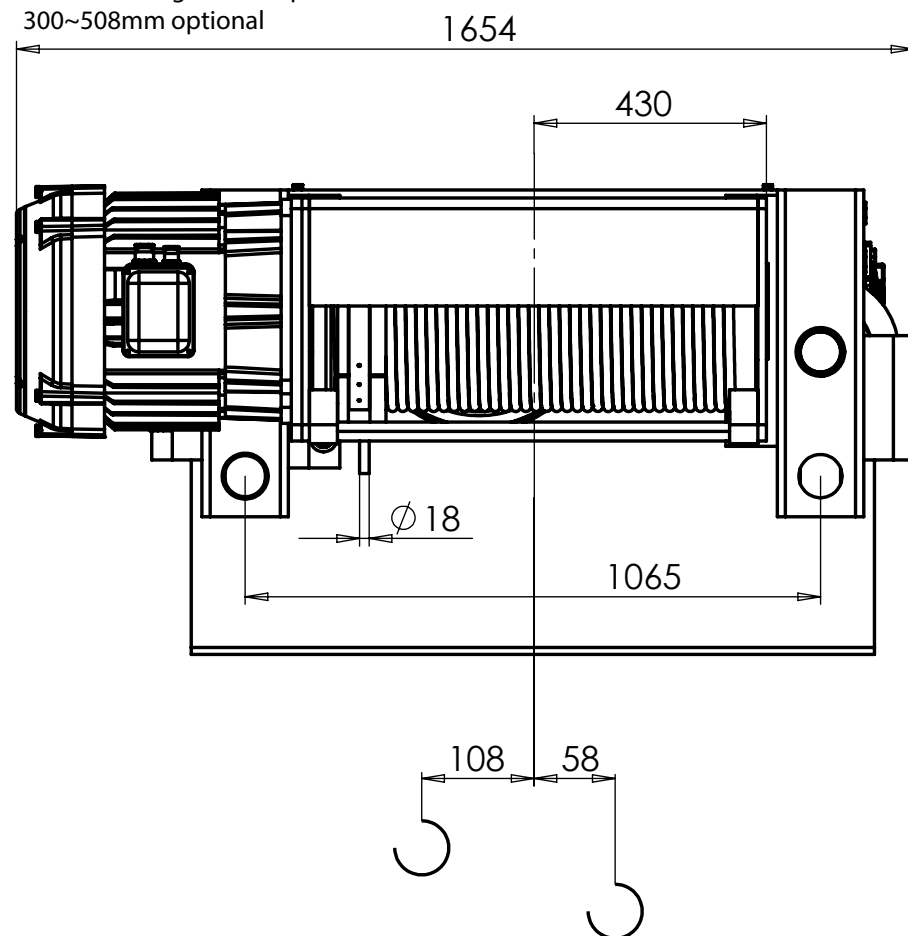

### Lifting Motor model KV5001-24/6


Rated power - 3.6/ 15.6 kW

Switches per hour - 240h-1

### Trolley Motor model 2x TP1200.84. AK80P-12/4

Rated power - 0.22/0.66 kW

Switches per hour - 240h-1

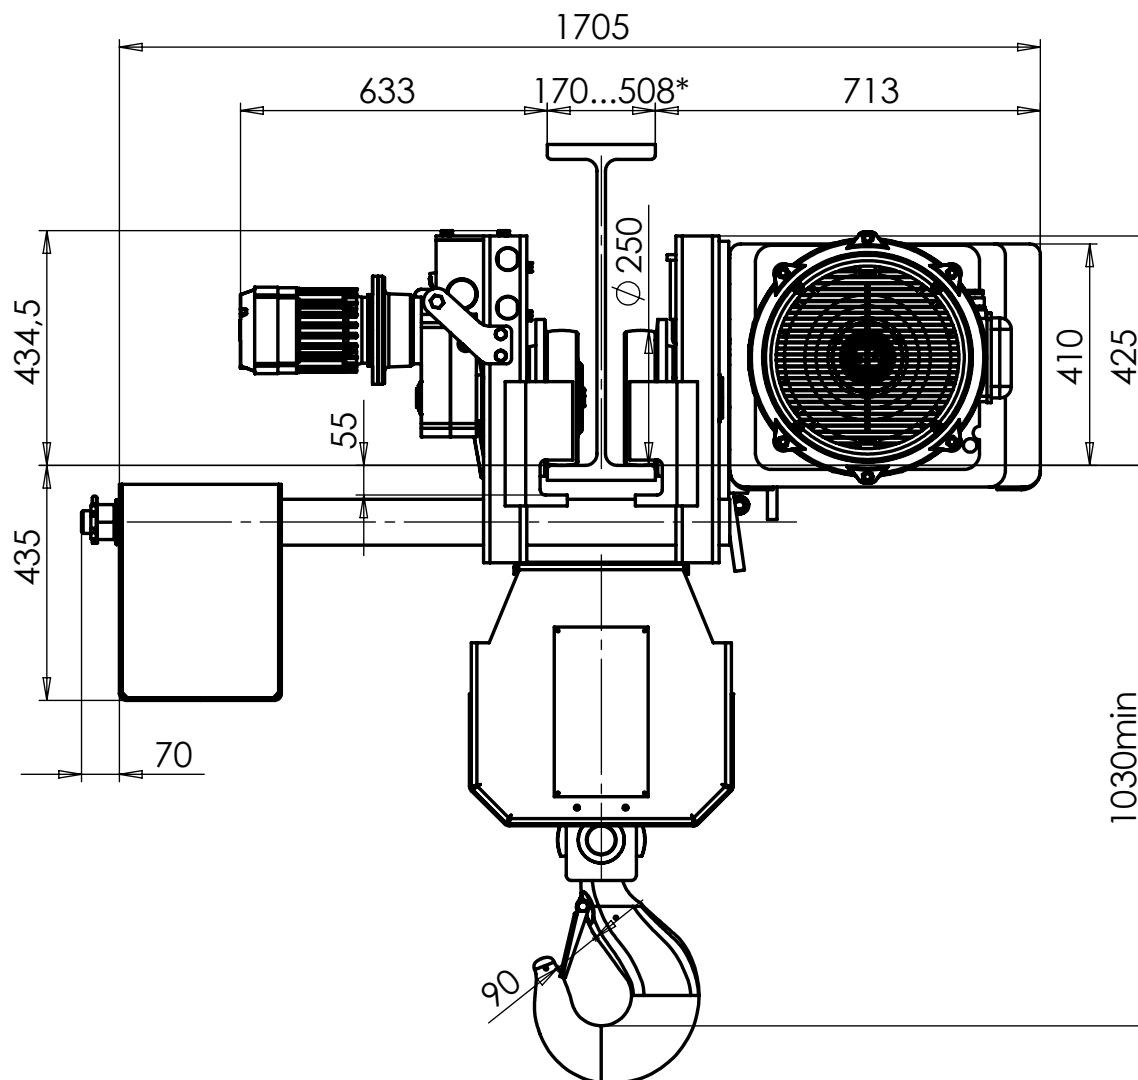

t 604 796 9221

e integrity@hydramachcrane.com

f 604 796 9227

www.hydramachcrane.com

\*Dimensions and specifications subject to change without notice.