

Top Running Electric Wire Rope Hoist

Hoist model KVATP25..2TpE315N

Capacity - 5 tonne in FEM9.511 - 2m [H4]

Lifting Speed - 4.8/1.2 m/min

Voltage - 230,460 & 575V-3ph-60Hz

Trolley Speeds - 14.4/4.8 m/min

Rope Reeving - 4/1

Optional thermal overload protection (Tp)

Mechanical overload protection (OL)

Electric panel not shown

Lifting Motor model KV2003P 24/6

Rated power - 1.1/4.6 kW



Switches per hour - 300h-1

Trolley Motor model 2x TP1200.57. AK80B-12/4

Rated power - 0.14/0.44 kW

Switches per hour - 240h-1

*Dimensions and specifications subject to change without notice.

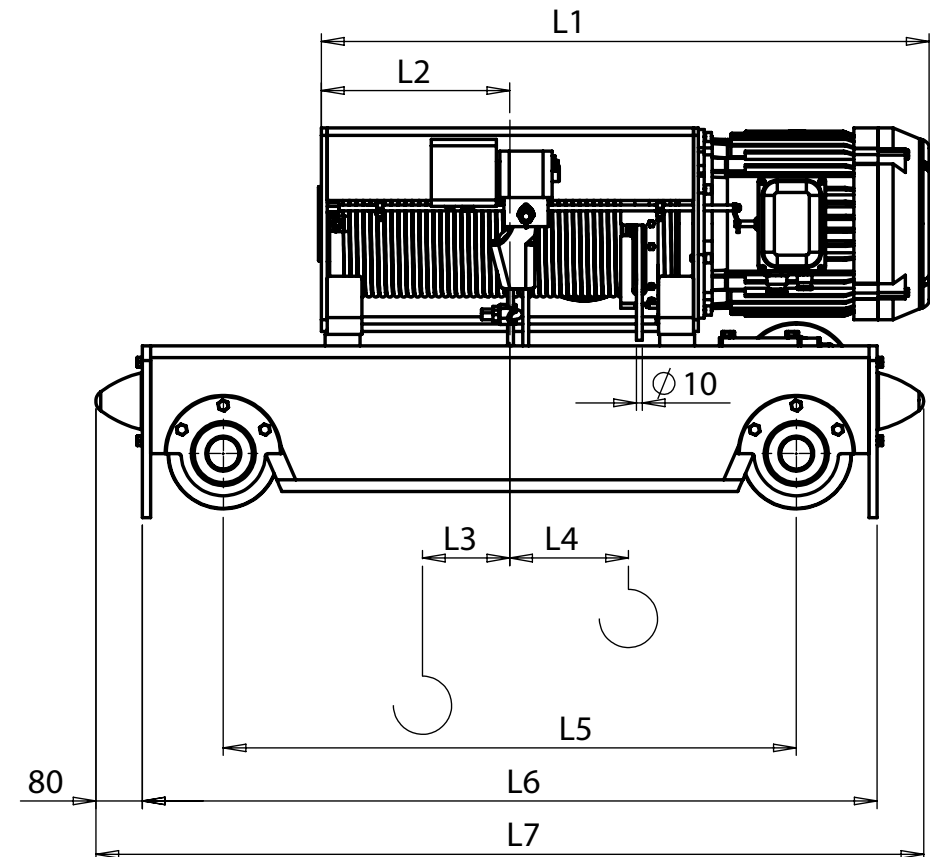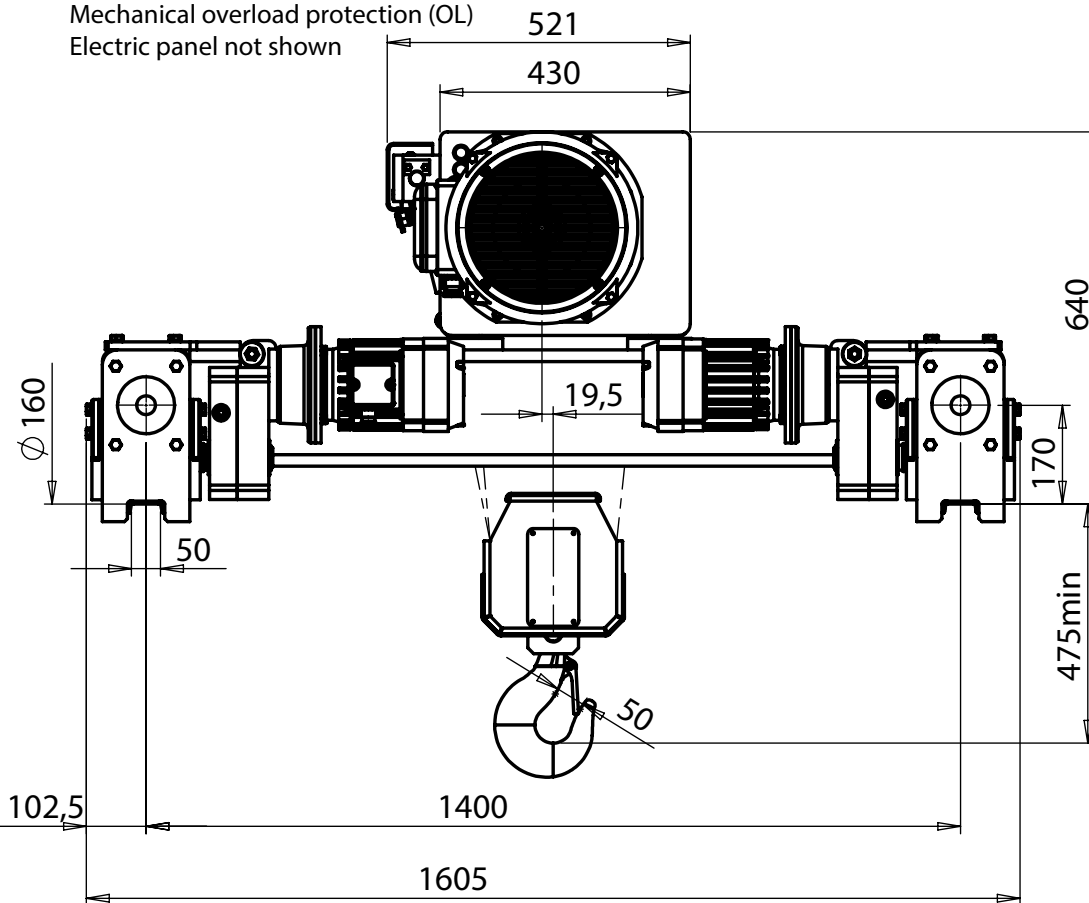

MODEL	H [m]	L1 [mm]	L2 [mm]	L3 [mm]	L4 [mm]	L5 [mm]	L6 [mm]	L7 [mm]	G [kg]
KVATP2512TpE315N	7,5	1042	324	-10	132	985	1263	1423	780
KVATP2522TpE315N	11	1262	434	-65	242	1205	1483	1643	815
KVATP2532TpE315N	14,5	1482	544	-120	352	1425	1703	1863	870



t 604 796 9221

f 604 796 9227

e integrity@hydramachcrane.com

www.hydramachcrane.com